

Integra®

DRX-5.4

9.2-CHANNEL NETWORK A/V RECEIVER



Welcome Extraordinary into Your Home

Theater-reference Dolby Atmos® or DTS:X® sound through up to 7.2.4 channels* complements 8K HDR video passthrough. Connect 5.2.4-ch speakers and Zone 2 speakers and switch between 5.2.4-ch and 5.2.2-ch + Zone 2 playback, or use 5 GHz/2.4 GHz Wi-Fi® and your voice to control music all around your home.

* Requires connection of an external stereo power amp.

AUDIO & VIDEO HIGHLIGHTS

- 5.2.4/7.2.2-ch Dolby Atmos® and DTS:X® playback
- DTS Virtual:X™ and Dolby Atmos Height Virtualization
- Dolby Surround® and DTS® Neural:X upmixing
- HDMI® supports 8K/60p, HDR10+, Dolby Vision™, HDR10, HLG, 4:4:4/24-bit and BT.2020 color, VRR (Variable Refresh Rate), DSC (Display Stream Compression), ALLM (Auto Low Latency Mode), QFT (Quick Frame Transport), QMS (Quick Media Switching), eARC (enhanced Audio Return Channel), DeepColor™, x.v.Color™, LipSync, and HDCP 2.3¹¹
- 11.2-ch pre-outs² and processing for 7.2.4-ch³ layouts
- HDMI Main Out with eARC for upstream HQ audio transmission, Sub/Zone 2 Out with OSD⁴
- Bidirectional Bluetooth® Version 4.2 + LE (A2DP v1.2, AVRCP v1.3; RX: SBC/AAC, TX: SBC/Qualcomm® aptX™/apt X HD)
- Separate Zone 2 speaker outputs enable 5.2.4-ch + Zone 2 speaker connection, 5.2.4-ch playback switching to 5.2.2-ch + Zone 2 playback⁵
- Dedicated DACs support synced/independent D/A audio distribution in Zone 2 and Zone 3 (including HDMI/SPDIF/NET®) via Zone 2 and Zone 3 speaker outputs, Zone 2 pre-out⁷ and Zone 3 pre-out²
- Share any MAIN audio source to a wireless headphone dock via Zone B line-out⁷
- Phono equalizer (MM) and SACD (Super Audio CD) playback via HDMI (2.8 MHz 2-ch/multichannel)
- Dirac Live® Room Correction supports multi-point acoustic calibration
- Original DSP-based Vocal Enhancer clarifies in-program vocals/dialog

AMPLIFICATION TECHNOLOGY

- 120 W per channel (8 ohms, 20 Hz–20 kHz, 0.08% THD, 2-ch driven, FTC)
- THX® Certified Select™ for Theater Reference Sound
- IMAX® Enhanced certified for IMAX® digital remasters
- Low-impedance amp system with 4-ohm speaker-driving capability
- Massive custom transformer and customized 15,000 µF capacitors
- Copper bus-bar connects capacitors to amplifiers
- Non-phase-shift amp-circuit topology, audio-grade parts, and separate digital/analog circuit boards
- Extruded anti-resonant aluminum heat-sink
- Precision DAC supports 192 kHz/24-bit multichannel D/A conversion
- VLSC™ (Vector Linear Shaping Circuitry) filtering technology (Front L/R)
- PLL (Phase-Locked Loop) jitter-cleaning circuitry for SPDIF digital audio
- Front L/R speaker bi-amping capability in 5.2/7.2/5.2.2-ch configuration
- Independent tone controls (bass/treble) for all channels

NETWORK FEATURES AND MULTI-ZONE AUDIO

- Isolated quad-core SoC board supports high-speed 802.11ac (2x2 MIMO®) Wi-Fi®
- Amazon Music, Spotify®, TIDAL, TuneIn, Pandora®, and Deezer⁹
- Works with Sonos for the Sonos Home Sound System¹⁰
- Works with Alexa¹¹
- Works with Hey Google¹² and Chromecast built-in™
- AirPlay 2 multi-room audio with Siri voice control
- DTS Play-Fi®¹³ multi-room audio via Integra Music Control App¹⁴
- Compatible with the Integra Remote app for iPad®, iPhone®, and Android™¹⁴
- Roon Tested certified for the Roon Core
- Hi-Res Audio via network (Direct DSD 11.2 MHz, DSD 5.6 MHz/2.8 MHz¹⁵, FLAC, WAV [RIFF], ALAC, and AIFF to 192 kHz/24-bit¹⁶)

AUDIO-VIDEO CONNECTIONS

- 7 HDMI inputs (1 front), Main Out (eARC), Sub/Zone 2 Out
- 2 digital audio inputs (rear, 1 optical, 1 gold-plated coaxial, assignable)
- 6 gold-plated analog audio inputs (rear, assignable)
- Gold-plated phono input and built-in equalizer (MM) for turntable connection
- USB input (5 V/1 A) for audio playback (rear)
- 1/8" (3.5 mm) Dirac Live/AccuEQ Advance setup mic input (front)
- 2 gold-plated composite video inputs (rear, assignable)
- 1 gold-plated component video input (rear, assignable)
- 1/4" (6.3 mm) gold-plated headphone jack
- 11 gold-plated banana-plug-ready speaker posts with transparent knobs (including Zone 2)
- Dedicated gold-plated Zone 2 speaker outputs⁵
- Gold-plated 11.2-ch pre-outs²
- Gold-plated Zone 2 pre-out / Zone B line-out (analog RCA⁷)
- Ethernet LAN terminal

CUSTOM INTEGRATION FEATURES

- Ethernet supports setup and IP control via web browser
- Works with Crestron®, AMX® by HARMAN, and Control4® automation
- RS-232 input for external control and automation
- 2 IR inputs and 1 output
- 3 programmable 12 V trigger-outs with adjustable delay (A: 100 mA, B: 25 mA, C: 25 mA)
- Dealer-settings memory storage and recall function
- AC inlet for detachable IEC power cable
- Optional rack-mount kit (IRK-180-4C)

ADDITIONAL FEATURES

- Aluminum front panel and volume knob
- Front-to-Surround/Height speaker switching in Stereo Assign Mode
- One-touch volume memory preset assignment to individual A/V inputs via front panel
- Dolby® TrueHD and DTS-HD Master Audio® decoding
- THX® listening modes for films, games, and music
- Advanced Music Optimizer™ improves compressed audio playback quality
- High-definition GUI over HDMI featuring source input/output data display
- Super Resolution 1080p to 4K and 1080p/4K to 8K video upscaling via HDMI
- Crossover Adjustment (40/45/50/55/60/70/80/90/100/110/120/130/150/180/200 Hz)
- A/V Sync Control (Up to 500 ms in 1 ms steps at 48 kHz¹⁷)
- Sleep timer, HDMI passthrough, and network standby
- 40 FM/AM/internet radio presets with station-naming (10 characters)
- 3-Mode display dimmer (Normal/Dim/Dimmer)

¹¹ Features defined in HDMI 2.1 supported on HDMI inputs 1–6 and Main Out. ¹² Height 2 and Zone 3 pre-outs are exclusive modes shared on the same analog RCA output. ¹³ Requires connection of an external stereo power amplifier. ¹⁴ Audio-video output via HDMI Sub/Zone 2 Out is supported via HDMI inputs 1–3. ¹⁵ Playback via Height 2 (5.2.4-ch layout) or Surround Back (7.2.2-ch layout) speaker outputs is unavailable when playing in 5.2.2/7.2.2-ch + Zone 2 speaker output mode. Output via Zone 2 speaker output and Zone 2 pre-out enabled. ¹⁶ Zone 2 HDMI audio is available on inputs 1–3. SPDIF and HDMI support PCM signals only. Zone 3 supports analog/NET only. ¹⁷ Zone 2 pre-out and Zone B line-out are exclusive modes shared on the same analog RCA output. ¹⁸ Some countries or regions have regulations that affect wireless signal strength and the use of Wi-Fi channels. ¹⁹ Service availability varies with region, and a paid subscription may be required. ²⁰ Requires a Sonos Connect or Port (sold separately). Works with the Sonos Music Control App available free for compatible iPhone®, iPad®, and Android™ devices. ²¹ Voice control requires an Amazon Alexa enabled device. ²² Voice control requires a Google Assistant enabled device. ²³ Enabled with a future firmware update. ²⁴ Available free for compatible iPhone, iPad, and Android devices. ²⁵ Converted to PCM (excluding Direct DSD 11.2 MHz). Playback not guaranteed via wireless LAN. ²⁶ Supported sampling rates may vary depending on network environment. ALAC is supported to a maximum 96 kHz. ²⁷ Max. 400 ms (1 ms steps) at 96 kHz, and max. 200 ms (1 ms steps) at 192 kHz.



SPECIFICATIONS

AMPLIFIER SECTION

Power Output
Front L/R: 250 W/Ch at 6 Ohms, 1 kHz, 10%,
1 Channel Driven,
120 W/Ch at 8 Ohms, 20 Hz–20 kHz, 0.08%,
2 Channels Driven, FTC

Dynamic Power: 250 W (3 Ohms, Front)
220 W (4 Ohms, Front)
130 W (8 Ohms, Front)

Input Sensitivity and Impedance: 200 mV rms/47 k-Ohms (Line/Unbalance)
3.5 mV rms/47 k-Ohms (Phono MM)

THD+N (Total Harmonic Distortion + Noise): 0.08% (20 Hz–20 kHz, Half Power)

Rated RCA Output Level and Impedance: 1 V rms/470 Ohms (Subwoofer Pre-out)
200 mV rms/470 Ohms (Zone 3/Height 2/Pre-/Line-out)

Phono Overload: 70 mV (MM, 1 kHz, 0.5%)

Frequency Response: 10 Hz–100 kHz/+1 dB, -3 dB (Direct Mode)

Tone Control: ±10 dB, 20 Hz (Bass)
±10 dB, 20 kHz (Treble)

Signal-to-Noise Ratio: 106 dB (IHF-A, Line)
80 dB (IHF-A, Phono)

Speaker Impedance: 4 Ohms–16 Ohms

VIDEO SECTION

Signal Level 1 Vp-p/75 Ohms Composite Video
1 Vp-p/75 Ohms Component Video (Y)
0.7 Vp-p/75 Ohms Component Video (Pb/Pr)

TUNER SECTION

Tuning Frequency Range: FM 87.5 MHz–107.9 MHz
AM 530 kHz–1,710 kHz

FM/AM Preset Memory: 40 Stations

GENERAL

Power Supply: AC 120 V~, 60 Hz

Power Consumption: 850 W

Standby Power Consumption: 0.15 W


Dimensions (W x H x D): 17 1/8" x 7 13/16" x 15 5/16"
(435 x 198 x 388.5 mm)

Weight: 30.9 lbs. (14.0 kg)

CARTON

Dimensions (W x H x D): 22 1/16" x 12 5/8" x 18 3/16"
(560 x 320 x 462 mm)

Weight: 37.5 lbs. (17.0 kg)

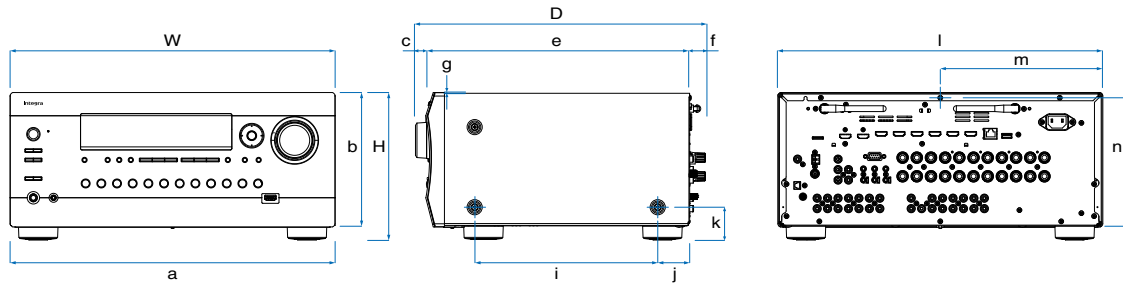

W	H	D	a	b
17 1/8" (435 mm)	7 25/32" (198 mm)	15 9/32" (388.5 mm)	17 1/8" (435 mm)	7 3/32" (180 mm)
c	e	f	g	i
15 1/16" (23.8 mm)	13 17/32" (343.5 mm)	27 1/32" (21.2 mm)	1 3/32" (1 mm)	9 21/32" (245.2 mm)
j	k	l	m	n
1 11/16" (42.8 mm)	1 23/32" (44 mm)	17 1/16" (433 mm)	8 17/32" (216.5 mm)	7 1/2" (190.6 mm)

Due to a policy of continuous product improvement, Integra reserves the right to change specifications and appearance without notice. THX and the THX logo are trademarks of THX Ltd., registered in the U.S. and other countries. THX CERTIFIED SELECT and the THX SELECT application icon are trademarks of THX Ltd. Dolby, Dolby Atmos, Dolby Surround, Dolby Vision, and the double-D symbol are trademarks of Dolby Laboratories. For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, DTS and the Symbol together, DTS:X and the DTS:X logo, DTS Neural:X and the DTS Neural:X logo, and Play-Fi and the Play-Fi logo are registered trademarks or trademarks of DTS, Inc. © DTS, Inc. All Rights Reserved. Manufactured under license from IMAX Corporation. IMAX® is a registered trademark of IMAX Corporation in the United States and/or other countries. All Rights Reserved. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. SONOS is a trademark of SONOS, Inc. The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. AirPlay, Siri, iPad, and iPhone are registered trademarks of Apple Inc. Google, Android, Chromecast built-in and other related marks and logos are trademarks of Google LLC. Wi-Fi® is a registered trademark of the Wi-Fi Alliance. The Wi-Fi CERTIFIED Logo is a certification mark of the Wi-Fi Alliance. Spotify and the Spotify logo are trademarks of the Spotify Group, registered in the U.S. and other countries. Roon is a trademark of Roon, LLC, registered in the U.S. and other countries. Products displaying the Hi-Res Audio logo conform to the Hi-Res Audio standard as defined by Japan Audio Society. The Hi-Res Audio logo is used under license from Japan Audio Society. PANDORA, the PANDORA logo, and the Pandora trade dress are trademarks or registered trademarks of Pandora Media, Inc. Used with permission. Amazon, Amazon Music, and all related logos and motion marks are trademarks of Amazon.com, Inc. or its affiliates. Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. aptX is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries. Qualcomm aptX is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Dirac Live® is a registered trademark of Dirac Research AB protected by Swedish and international trademark laws and treaties. Integra Remote, Integra Music Control App, Music Optimizer, VLS-C, and AccuEQ are registered trademarks or trademarks of Onkyo Corporation. All other trademarks and registered trademarks are the property of their respective holders.